


**MINIMUM CLEAR OPENING REQUIREMENTS**

24" MINIMUM CLEAR HEIGHT  
20" MINIMUM CLEAR WIDTH  
5.7 SQ MINIMUM OPENED AREA

**SILL HEIGHT**

MAXIMUM 44" ABOVE FLOOR

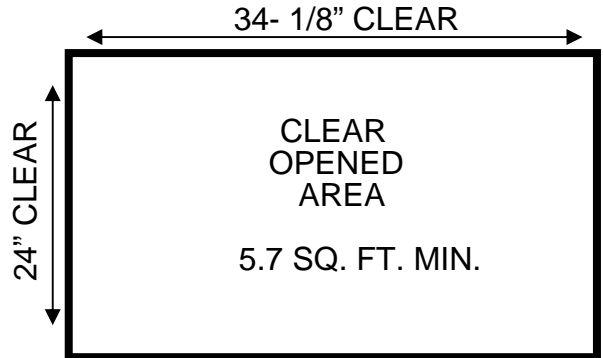


MINIMUM SIZE CLEAR OPENING FOR 24" CLEAR OPENED HEIGHT


MINIMUM SIZE CLEAR OPENING FOR 20" CLEAR OPENED WIDTH

**THE FOLLOWING WINDOW SIZES WILL BE THE MINIMUM ALLOWED FOR EGRESS UNLESS MANUFACTURER DATA IS SUPPLIED OR ACTUAL CONDITIONS CONFORM.**


**STANDARD 6'-8" HEADER HEIGHT**

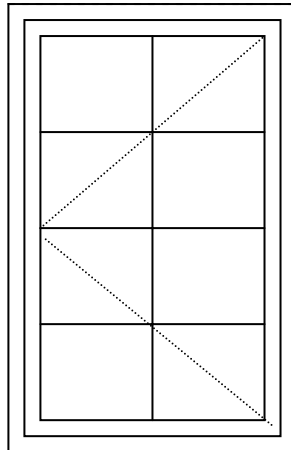

**SINGLE CASEMENT:**  
2-4 X 4-0; 2-6 X 3-6  
**DOUBLE CASEMENT:**  
4-8 X 4-0  
**CASEMENT FIXED COMBO:**  
7-0 X 4-0  
**OTHER WINDOW TYPES**  
AWNING – "GREENHOUSE."  
NONE W/O MANF. DATA

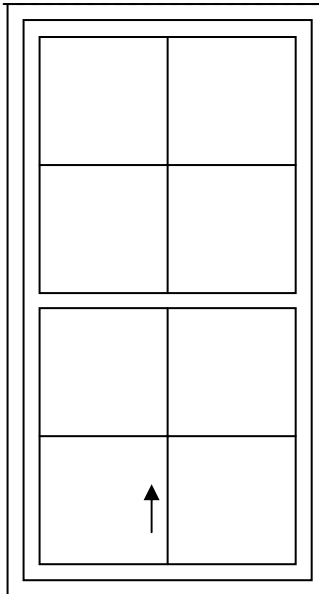

**SINGLE/DOUBLE HUNG:**  
3-0 X 5-0  
3-0 X 5-6  
3-4 X 5-0  
3-8 X 5-0  
4-0 X 5-0

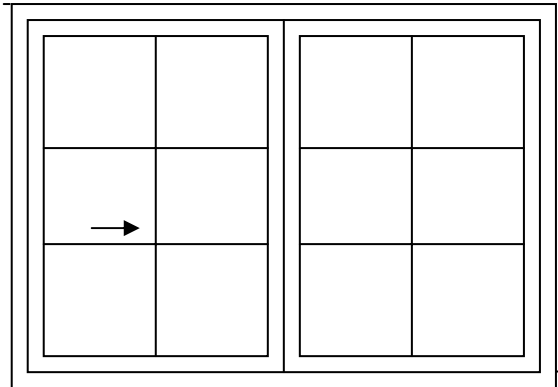

**SLIDER**  
4-0 X 4-0  
5-0 X 3-6  
6-0 X 3-0  
**SLIDER**  
8-0 X 4-0  
10-0 X 4-0  
12-0 X 3-0

**NOTE:** SIZES ARE TAKEN FROM DATA SUPPLIED BY WINDOW MANUFACTURERS. HOWEVER, THESE ARE GENERAL DIMENSIONS. IT IS THE OWNERS RESPONSIBILITY TO VERIFY THAT THE ACTUAL WINDOWS INSTALLED MEET THE MINIMUM EGRESS REQUIREMENTS.

44" MAXIMUM

44" MAXIMUM SILL HT.

**BAY W/FIXED CENTER**  
NONE W/O MANF. DATA

**SINGLE/FIXED COMBO:**  
NONE W/O MANF. DATA

FLOOR